

ELM Series



ELM-1000



ELM-300



ELM-600



ELM-100




ELM-2000



ELM-3000
Safety Factor of ELM-3000
is 3.0 times.

6 models are available

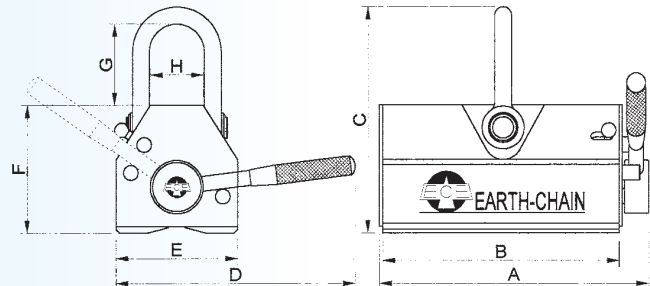

DIMENSIONS

MODEL	Capacity		A		B		C		D		E		F		G		H		Weight		SAFETY FACTOR
	kg	lbs	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	kg	lbs	
ELM-100	100	220	107	4.2	84	3.3	120	4.7	125	4.9	60	2.4	71	2.8	41	1.6	30	1.2	2.5	5.5	× 3.5 times
ELM-300	300	660	180	7.1	155	6.1	156	6.1	185	7.3	90	3.6	93	3.7	51	2.0	41	1.6	8.6	18.9	
ELM-600	600	1320	255	10	224	8.8	212	8.3	260	10.2	115	4.5	120	4.7	77	3.0	52	2.0	21	46	
ELM-1000	1000	2200	280	11	245	9.6	286	11.3	371	14.6	165	6.5	169	6.7	97	3.8	87	3.4	46	101	
ELM-2000	2000	4400	422	16.6	380	15	348	13.7	512	20.2	216	8.5	215	8.5	105	4.1	121	4.8	118	259	
ELM-3000	3000	6600	566	22.3	530	20.9	400	15.7	770	30.3	216	8.5	222	8.7	147	5.8	80	3.2	181	399	× 3.0 times

ELM Series

● FEATURES


1. Made by "Rare Earth" magnet with technology of improvement.
2. All new models with "light weight" "less dimension" and "lower price".
3. Made by permanent magnet, require no power supply, thus eliminating hazards due to failure wiring system as electric type.
4. It features powerful magnetic force, with 3.5 times safety coefficient makes more safety in use.

● APPLICATIONS

Suitable for move plate steel, block steel and round steel, such as machine parts, press molds, plastic molds and iron materialetc.




EXAMPLE IN USE

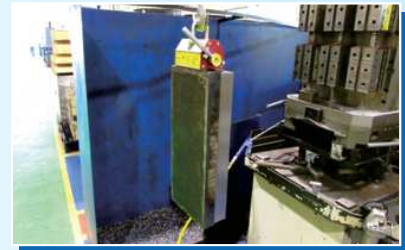

● OPERATIONS

With ON/OFF switch, it is very easy and convenient to operate. See as the example pictures as below.

ON

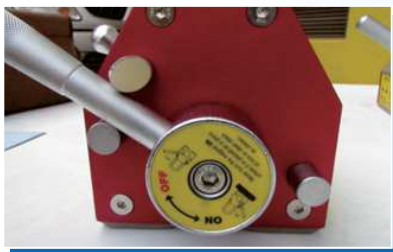

OFF



Notice: Never moves the handle to "ON" side, except on an iron object of holding.